

PFM 863

Personal FM™ Listening System




The Personal FM Listening System, model PFM 863, helps to overcome distance from the speaker, reduces background noise and distractions for improved hearing in the classroom, job training, consultation and more. The speaker uses the T863 transmitter equipped with a microphone to deliver their message wirelessly to a listener. The listener uses the R863 receiver equipped with an earphone or headphone to pick-up the speaker's message. The Personal FM system helps to overcome background noise, distance from the speaker, and enhances the quality of the message for all participants. The Personal FM system operates on 863 MHz, meets RoHS approval guidelines, and is backed by a 3 year factory warranty.

Designed for the European marketplace.

Personal FM™ Listening System

T863 Transmitter:

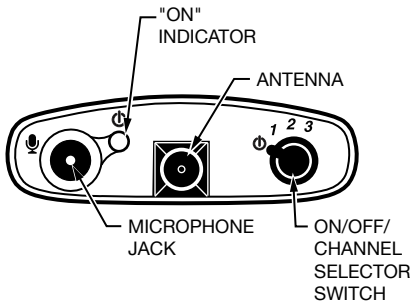


A216

Dimensions:	155 mm H x 72 mm W x 30 mm T (6.1" H x 2.85" W x 1.2" T)
Weight:	82 grams (2.89 oz.), no batteries
Color:	Black
Material:	ABS/Polycarbonate, shatter-resistant
Battery Type:	Two (2) AA 1.5 V Non-rechargeable Alkaline batteries (BAT 001), 100 mA nominal current drain, 20 hours approx. life (OR) Two (2) AA 1.2 V NiMH Rechargeable batteries (BAT 026), 100 mA nominal current drain, 15 hours per charge approx., recharges in 14-16 hours, uses CHG 3512 Multiple Battery Charger
Operating Frequencies:	CH 1 - 863.25 MHz; CH 2 - 863.75 MHz; CH 3 - 864.75 MHz (±30 kHz)
Operating Range:	30 meters (98.4 feet) with R863 receiver
Stability:	± .05 MHz, 0 - 50° Celsius
FM Deviation:	60 kHz ±5 kHz, transmitter input at 1 kHz, 2.5 mV
Pre-Emphasis:	50 µS
Sensitivity:	< - 90 dBm @ 60 kHz deviation
RF Output:	5 - 10 dBm
Freq Response:	500 Hz - 5 kHz, ±3 dB
Distortion:	< 2.0% THD
Transmit Antenna:	External, 5cm
Microphone:	Head-worn, noise-cancelling, electret type, 39 in. cord, 3.5 mm mono phone plug (MIC 086)
Controls & Indicators:	Microphone gain adjust; Channel/Power selector (4 position rotary switch): "Power icon" is off; position 1 is CH1; position 2 is CH 2; position 3 is CH 3 Power on indicator: Red LED "on" indicates when receiver has power Low battery indicator: Power LED flashes when batteries are low Battery selector: Slide switch for alkaline or NiMH battery operation
Mic Connector:	3.5 mm jack
Charging Contacts:	Designed for use with CHG 3512 Battery Charger
Approvals:	CE, RoHS, WEEE, ETSI EN 301 357-1, ETSI EN 301 357-2
Warranty:	3 years parts and labor (90 days on accessories)

Personal FM™ Listening System

R863 Receiver

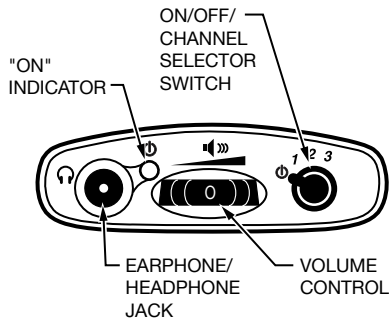

Dimensions:	115 mm H x 72 mm W x 30 mm T (4.5" H x 2.85 W x 1.2" T)
Weight:	85 grams (3 oz.), no batteries
Color:	Black
Material:	ABS/Polycarbonate, shatter-resistant
Battery Type:	Two (2) AA 1.5 V Non-rechargeable Alkaline batteries (BAT 001), 50 mA nominal current drain, 40 hours approx. life (OR) Two (2) AA 1.2 V NiMH Rechargeable batteries (BAT 026), 50 mA nominal current drain, 30 hours per charge approx., recharges in 14-16 hours, uses CHG 3512 Multiple Battery Charger
Operating Frequencies:	CH 1 - 863.25 MHz; CH 2 - 863.75 MHz; CH 3 - 864.75 MHz (± 30 kHz)
Operating Range:	30 meters (98.4 feet) with T863 transmitter
Stability:	± .05 MHz, 0 - 50° Celsius
FM Deviation:	60 kHz ±5 kHz, transmitter input at 1 kHz, 2.5 mV
De-Emphasis:	50 µs
Sensitivity:	< - 90 dBm @ 60 kHz deviation
Squelch:	-100 dB @ 6 kHz
Freq Response:	500 Hz - 5 kHz, ±3 dB
Distortion:	< 2.0% THD
Signal-Noise Ratio:	>50 dB (± 5 dB) with transmitter input at 1 kHz, 2.5mV
Antenna:	Internal wire monopole
Controls & Indicators:	Volume control knob; Channel selector (four position rotary switch): Position 1 is off; position 2 is CH1; position 3 is CH 2; position 4 is CH 3 Power on indicator: Red LED "on" indicates when receiver has power Low battery indicator: Power LED flashes when batteries are low Battery selector: Slide switch for alkaline or NiMH battery operation
Headphone jack:	3.5 mm jack, mono output, 8-32 ohm impedance
Charging Contacts:	Designed for use with CHG 3512 Battery Charger
Approvals:	CE, RoHS, WEEE, ETSI EN 301 357-1, ETSI EN 301 357-2
Warranty:	3 years parts and labor (90 days on accessories)

Personal FM™ Listening System

Bid Specs:

T863 Transmitter

The T863 shall be a portable, belt-pack equipped wide-band transmitter. The unit shall have three user-selectable operating frequencies of 863.25 MHz for CH1, 863.75 MHz for CH 2 and 864.75 MHz for CH 3. The T863 shall be housed in a black polycarbonate impact-resistant enclosure and feature a two-inch external antenna and 3.5mm mono microphone input.

The transmitter shall include an integrated on/off/channel selector control, an internal mic gain control, and power ON indicator LED. The power ON LED shall flash to indicate low battery.

The transmitter shall operate on two AA alkaline batteries for approx. 20 hours of operation or 15 hours with Williams Sound NiMH rechargeable batteries (BAT 026). The transmitter shall have drop-in charging points for charging with the optional CHG 3512.

The T863 shall have an operating range of approx. 30 meters (98 feet) when used with the R863 receiver and a signal ratio greater than 50dB with the R863 and 60 kHz deviation.

The T863 shall have CE, ETSI EN 301 357-1, ETSI EN 301 357-2 approvals, and be compliant with RoHS and WEEE regulations. The unit shall have a three year parts and labor warranty.*

The transmitter shall be the Williams Sound model number T863.

R863 Receiver

The R863 shall be a portable, belt-pack equipped wide-band receiver. The unit shall have three user-selectable operating frequencies of 863.25 MHz for CH 1, 863.75 MHz for CH 2 and 864.75 MHz for CH 3. The R863 shall be housed in a black polycarbonate impact-resistant enclosure and feature a 3.5mm ear jack that can accept stereo or mono earphones.

The receiver shall include an adjustable volume control, integrated on/off/channel selector and power ON indicator LED. The power ON LED shall flash to indicate low battery.

The receiver shall operate on two AA alkaline batteries for approx. 40 hours of operation or 30 hours when using Williams Sound NiMH rechargeable batteries (BAT 026). The receiver shall have drop-in charging points for charging with the optional CHG 3512.

The R863 shall have an operating range of approx. 30 meters (98 feet) when used with the T863 transmitter, and shall a signal to noise ratio greater than 50dB and 60 kHz deviation.

The R863 shall have CE, ETSI EN 301 357-1, ETSI EN 310 357-2 approvals, and be compliant with RoHS and WEEE regulations. The unit shall have a three year parts and labor warranty.*

The receiver shall be the Williams Sound model number R863.

***DISCLAIMER: FCC RULES LIMIT USE OF THIS EQUIPMENT TO AUDITORY ASSISTANCE**

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

Domestic Sales

Williams Sound
10300 Valley View Rd
Eden Prairie, MN 55344
Ph: 800-328-6190 / 952-943-2252
FAX: 952-943-2174
Email: info@williamssound.com
Web: www.williamssound.com

International Sales

International Sales Department
Williams Sound
10300 Valley View Rd
Eden Prairie, MN 55344 USA
Phone: +1 952 943 2252
Fax: +1 952 943 2174
Email: info@williamssound.com
Web: www.williamssound.com



WILLIAMS SOUND®
HELPING PEOPLE HEAR

800.843.3544 / info@williamssound.com / www.williamssound.com